

# NAD MT 1 MEDIA TUNER

## Mounting Instructions

### MOUNTING INSTRUCTIONS FOR THE C 375BEE

The MT 1 is compatible with C 375BEE. Using the supplied flexible flat cable (FFC), DC power connector and screws, the MT 1 can be installed in a C 375BEE by undertaking the following procedure.

#### STEP 1

Pre-install the requisite cables to their respective connector points on the MT 1 as shown. Connect the FFC to the MT 1's PHONO port only if the C375BEE has a PP375 already installed.

Note that if the C 375BEE has a PP375 Phono Preamplifier Module already installed, the MT 1 and the PP375 can be linked together using the other supplied FFC.






#### STEP 2

Make the following connections:

- 1 DC POWER connector from MT 1 to corresponding P216B in C375BEE's main board.
- 2 FFC from MT 1's ANALOG OUT to P213B on C375BEE's main board.
- 3 If the optional PP375 module is installed: FFC from MT 1's PHONO port to the corresponding FPC (flexible printed circuit) connector of the PP375 module.

Ensure good harnessing by flexing and safely contorting the FFC and DC POWER connectors.

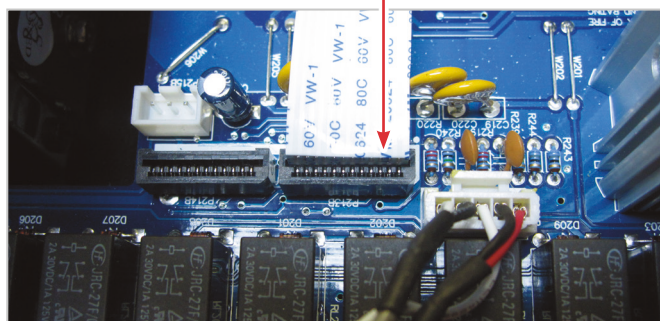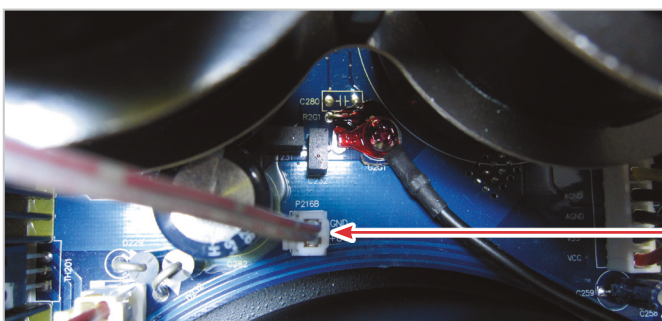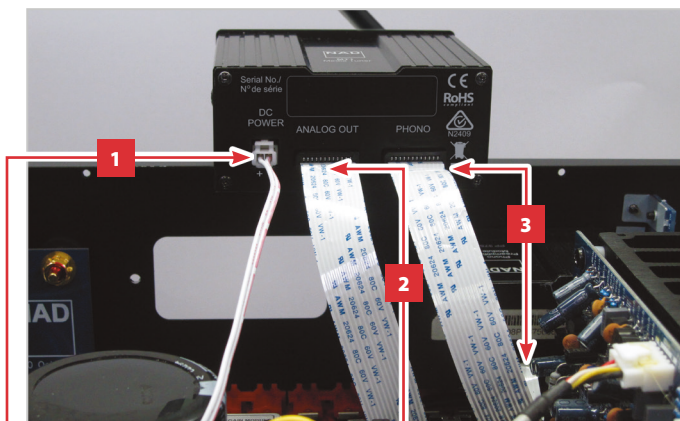

#### STEP 3

Remove the dummy cover at the back of the C375BEE and install in its place the MT 1. Use the supplied screws to fix into place the MT 1.



#### IMPORTANT!

The MT 1 is only compatible with C 375BEE units that have the **0.5W standby** logo on their rear panels.

## MOUNTING INSTRUCTION FOR THE C 356BEE

The MT 1 is compatible with C 356BEE. Using the supplied flexible flat cable (FFC), DC power connector and screws, the MT 1 can be installed in a C 356BEE by undertaking the following procedure.



### STEP 1

Pre-install the requisite cables to their respective connector points.

Connect the following

- 1 DC POWER connector from MT 1 to corresponding CB48 on C 356BEE's main board.
- 2 FFC from MT 1's ANALOG OUT to CB36 on C 356BEE's main board.

Ensure good harnessing by flexing and safely contorting the FFC and DC POWER connectors.

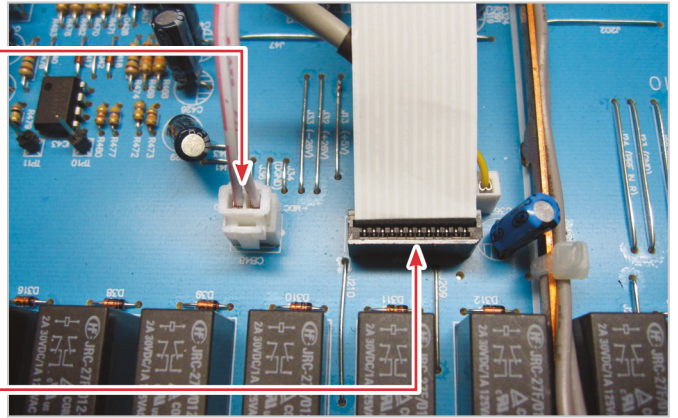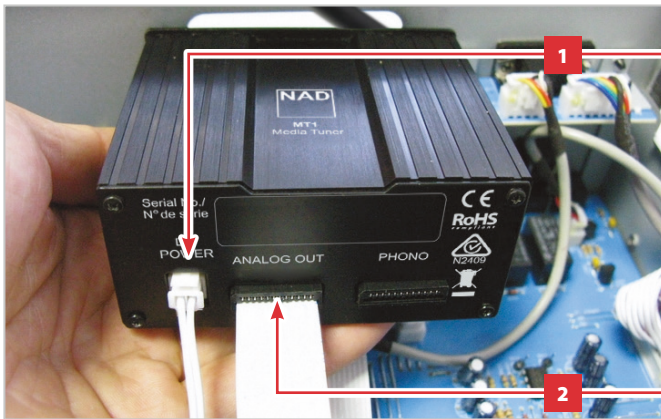

### STEP 2

Remove the dummy cover at the back of the C 356BEE and install in its place the MT 1. Use the supplied screws to fix into place the MT 1.



### NOTE

Download the latest MT1 owner's manual from the Manuals/Downloads tab at <http://nadelectronics.com/products/hifi-mdc-modules/MT-1-Media-Tuner-Module>